


PERFIL

DFL108

1 COMPONENTE
GASKET

MATERIAL	TEMPERATURA	PRESIÓN
PUR	-20 °C A 115 °C	400 bar
NBR	-30 °C A 110 °C	275 bar
FKM	-20 °C A 210 °C	275 bar
EPDM	-45 °C A 130 °C	275 bar
HNBR	-30 °C A 150 °C	275 bar
PUA	-20 °C A 110 °C	400 bar
PUG	-30 °C A 110 °C	400 bar

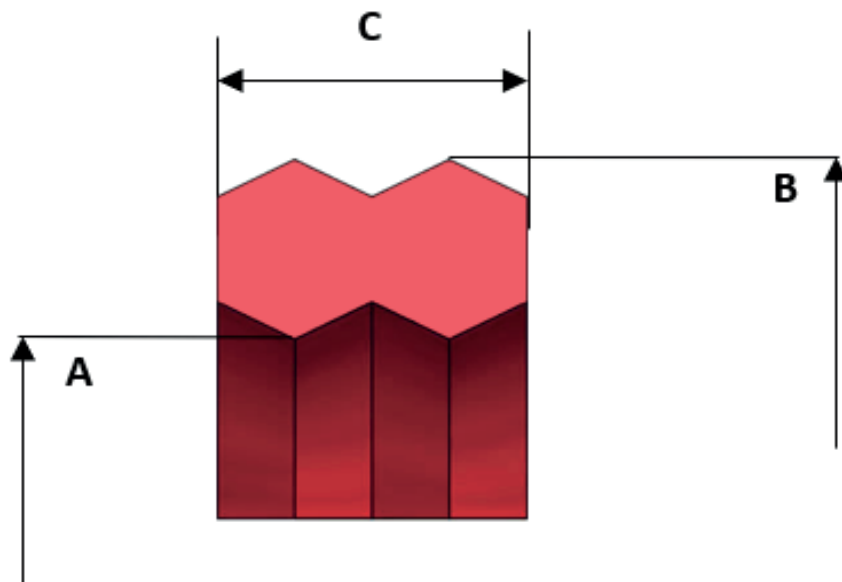

A:

Interior sello

B:

Exterior sello

C:

Altura sello

Material requerido:

Cantidad Solicitada:

Observaciones: